



CAAV

STAND UP SURFACE INSTALL


CHAIR WITH SCREEN:
HANGING CLEATS
ARE PRE-INSTALLED
ON PANEL

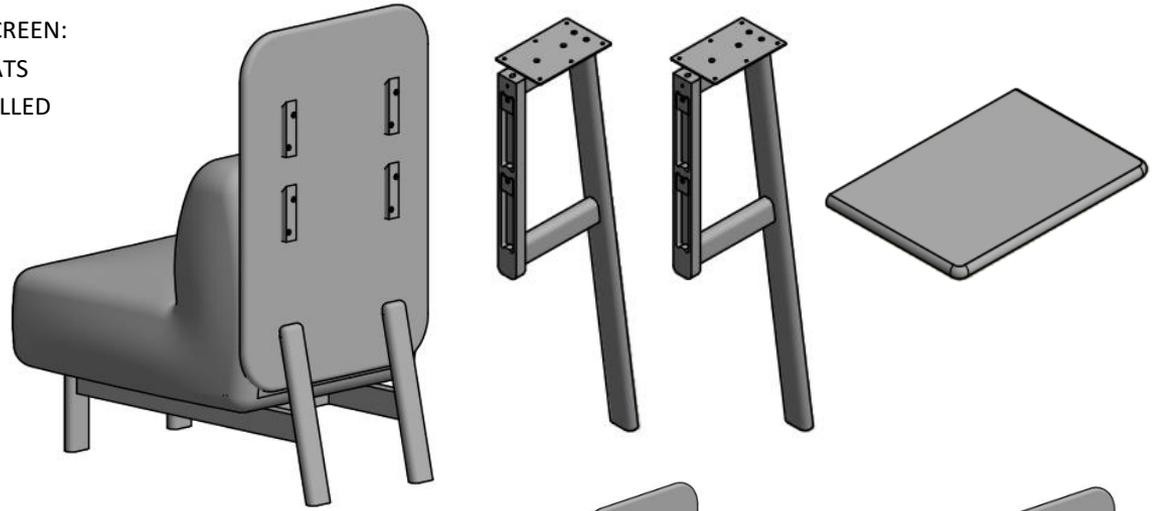

Recommended tools



#2 Phillips Head



Hardware enclosed



- "L" Brackets – 1 per leg support
- #8 x 1-½ pan head screws – 1 per leg support
- #8 x 7/8 flat head screw – 6 per leg support
- #8 x ½ pan head screw – 2 per leg support



NOTE: all screws provided must be installed for proper installation and compliance with product warranty.

UNIT WILL COME PACKED IN MULTIPLE BOXES:

- 1ST box will contain the chair with screen
- Remaining box(s) will contain the top panel and leg supports

STEP 1:

- Attach rear leg supports to screen by aligning the cleat on the back of the screen to the hanger inside the rear leg support.

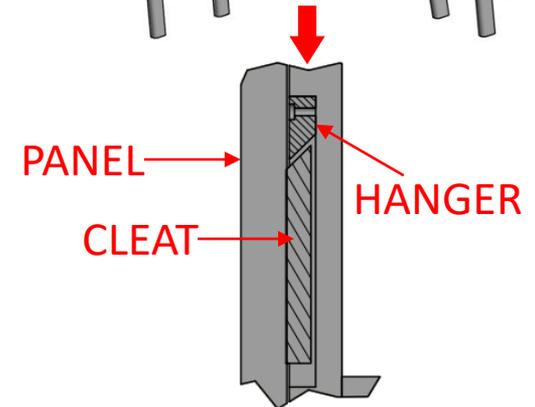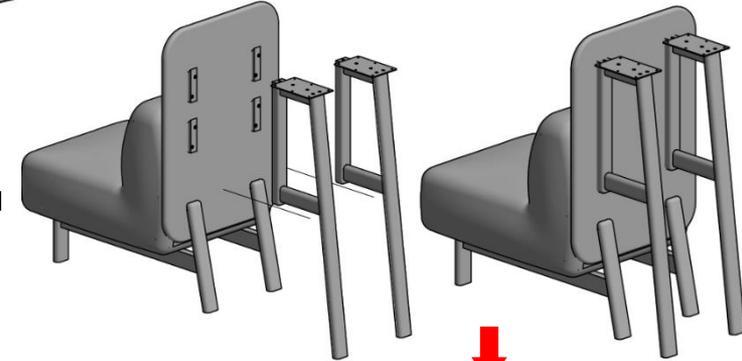

CAAV

STAND UP SURFACE INSTALL



STEP 2:

- Apply downward pressure on the leg assembly to fully engage the cleat and the hanger
- Lock the leg support down with a #8x1-1/2 pan head screw thru the top of the rear support as shown. **Only do this with the hand screw driver** – fasten slowly – you may torque down with drill after hand tightened- **This will help avoid pulling threads or foam when installing.**

STEP 3:

- Place the work surface on top of the support plates.
- Align pilot holes in top with holes in plate
- Use the #8x7/8 flat head screws to fasten top in place.

Recommended tools






Hardware enclosed



- “L” Brackets – 1 per leg support
- #8 x 1-½ pan head screws – 1 per leg support
- #8 x 7/8 flat head screw – 6 per leg support
- #8 x ½ pan head screw – 2 per leg support

NOTE: all screws provided must be installed for proper installation and compliance with product warranty.

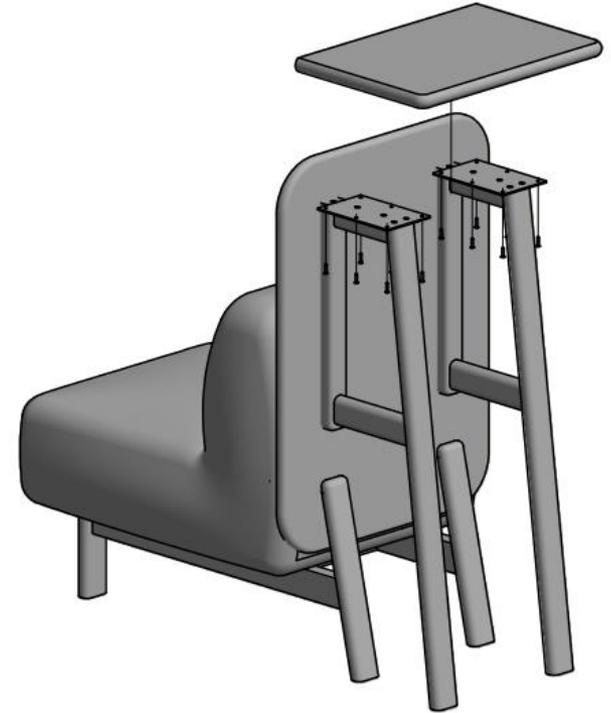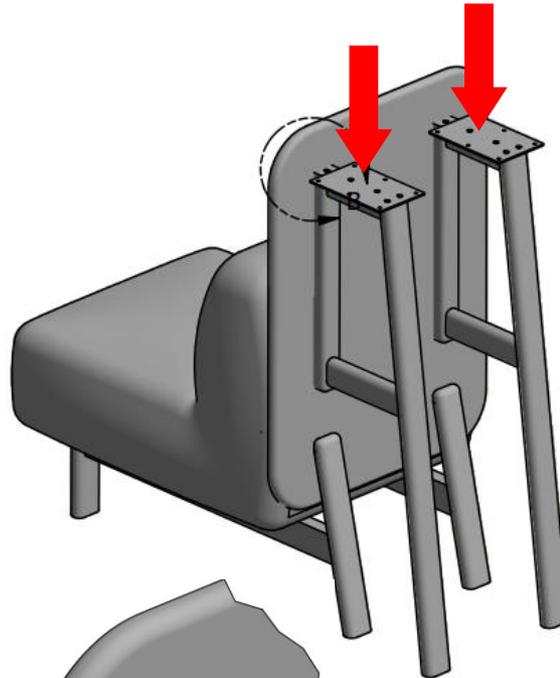

CAAV

STAND UP SURFACE INSTALL


STEP 4 (optional):

- Apply “L” brackets to the bottom of the top if additional stability is desired.
- Install using the #8x1/2 pan head as shown below. **Only do this with the hand screw driver** – fasten slowly – you may torque down with drill after hand tightened- ***This will help avoid pulling threads or foam when installing.***


STEP 5:

- Properly level unit using the leveling glides
- Install complete

Recommended tools



#2 Phillips Head



Hardware enclosed



- “L” Brackets – 1 per leg support
- #8 x 1-½ pan head screws – 1 per leg support
- #8 x 7/8 flat head screw – 6 per leg support
- #8 x ½ pan head screw – 2 per leg support

NOTE: all screws provided must be installed for proper installation and compliance with product warranty.

