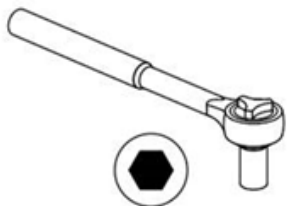# CAAV

RUN-OFF TABLE AND MEDIA PANEL ASSEMBLY

Recommended tools

Hardware enclosed

5/16 Flat Washer – 4 per
5/16 Split Lock Washer – 4 per
5/16-18 x 2-1/4 Hex Head Bolt – 4 per

NOTE: all screws provided must be installed for proper installation and compliance with product warranty.

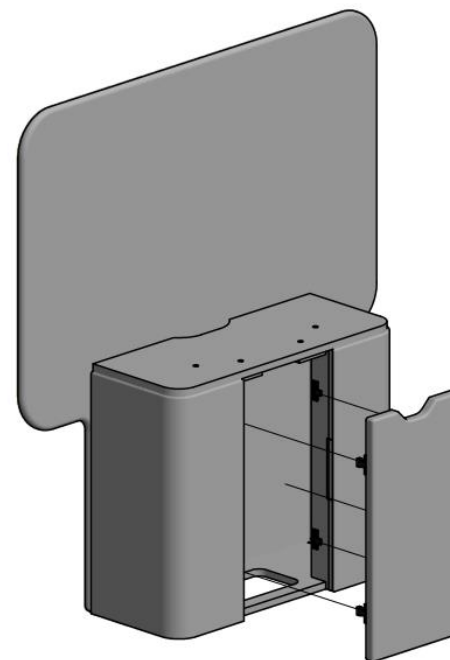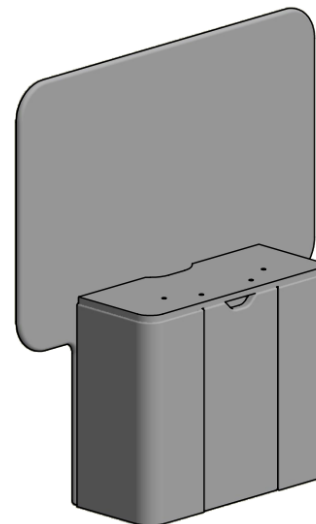Run-off table leg pre-assembled. See run-off table leg install instructions.

UNIT WILL BE MADE FROM 2 MODELS:

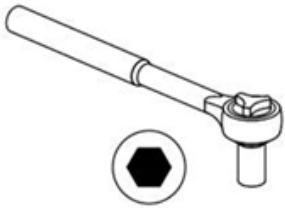- (1) Run-off Table
- (1) Media Panel

STEP 1:

- Grab access media panel access door by the hand hold
- Firmly pull straight out to disengage the clips
- Set access panel to the side during install

CAAV

RUN-OFF TABLE AND MEDIA PANEL ASSEMBLY

Recommended tools

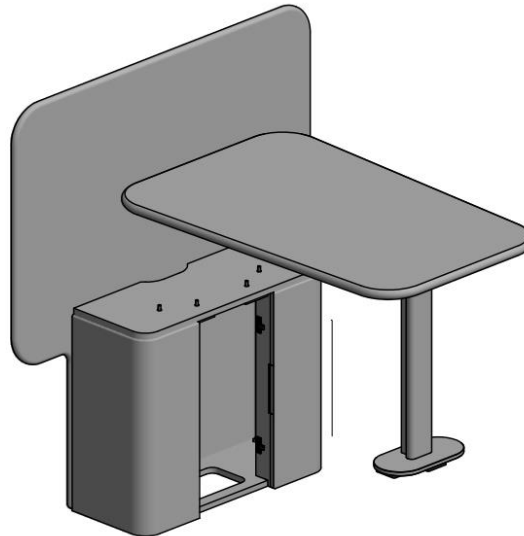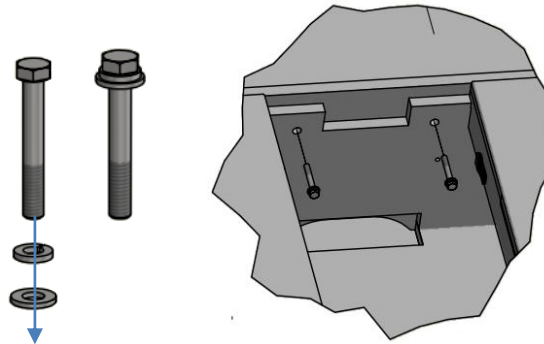### Hardware enclosed

5/16 Flat Washer – 4 per
5/16 Split Lock Washer – 4 per
5/16-18 x 2-1/4 Hex Head Bolt – 4 per

NOTE: all screws provided must be installed for proper installation and compliance with product warranty.

STEP 2:

- Insert the bolts thru the washers as shown
- Insert bolts/washers thru attachment holes in the medial panel sub-top as shown
- Align bolts with the inserts in the bottom of the run-off top
- Start all 4 bolts – once all are started firmly tighten bolts

STEP 3:

- Align clips on access door to clips in chassis and firmly snap panel back in place.
- Properly level media panel
- Neoprene pads on run-off table are self-leveling

- Install complete