


LOK TRAINING TABLES

Assembly Instruction for Hinged Acrylic Modesty Panel



Recommended tools



#2 Phillips Head



1/8" Drill Bit



Measuring Tape

1. Align the bolt holes in the metal decorative cap with the pre-drilled holes on the front side of the acrylic modesty panel. Then align the larger 9/32" holes of the hinge bracket with holes on the back side of the panel. Use (2) 1/4-20 x 1/2" machine screws to attach. (Fig.1A) Repeat for the remaining brackets. Panels for tables 60" and longer require (3) brackets. Panels for tables less than 60" require (2) brackets (Fig.1B)

Hardware enclosed



#8 x 5/8"
Panhead Screws
Qty= 6 for ≥60"
Qty = 4 for ≤48"



Hinge Brackets
Qty= 3 for ≥60"
Qty=2 for ≤48"



1/4-20 x 1/2"
Phillips Head
machine screw
Qty= 6 for ≥60"
Qty=4 for ≤48"



Decorative
Metal Cap
Qty= 3 for ≥60"
Qty=2 for ≤48"

NOTE: all screws provided must be installed for proper installation and compliance with product warranty.

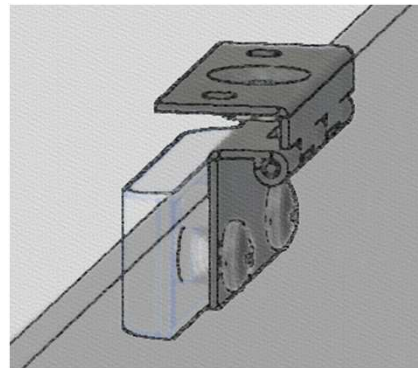


Fig. 1A

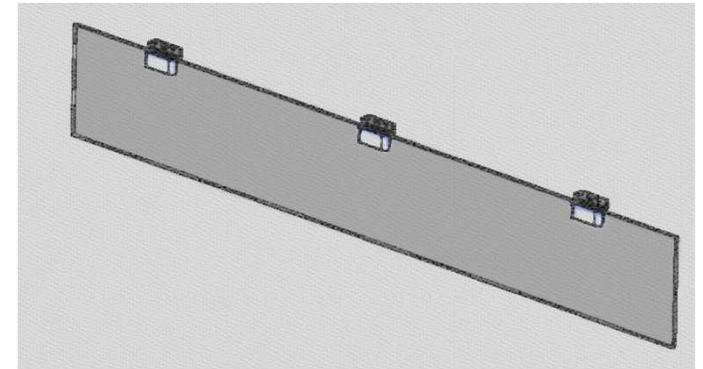


Fig. 1B

LOK TRAINING TABLES

Assembly Instruction for Hinged Acrylic Modesty Panel (Cont.)

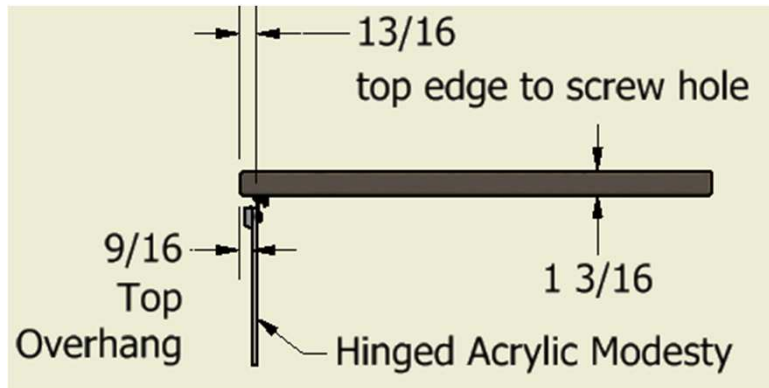


Diagram A

2. Position the modesty panel on the underside of the work surface. The modesty panel should be centered side to side (see diagram B). The face of the panel should be $9/16$ " from the approach edge of the work surface. (see diagram A)
3. Mark the screw hole locations on the underside of the worksurface. Drill a $1/8$ "dia. x $1/2$ " deep pilot hole in the positions marked.
4. Align the brackets with the pilot holes and secure each bracket in place with (2) # $8 \times 5/8$ " panhead screws provided.

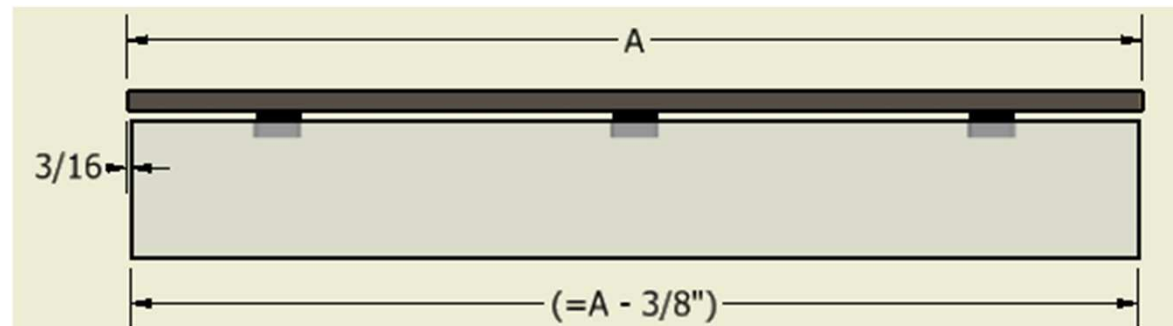
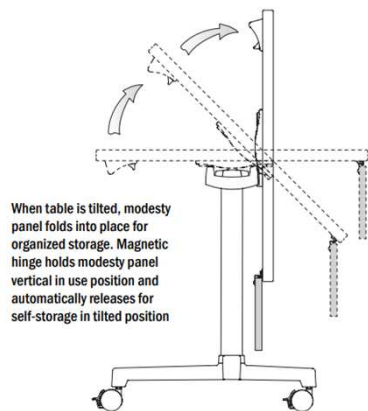


Diagram B