




# Brisa® | Original


Acoustical properties • Breathable technology

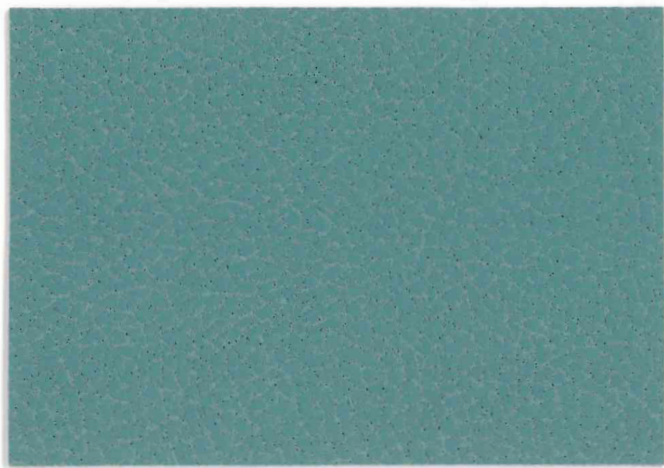

533-2697 Mineral

# Brisa® | Distressed

Acoustical properties • Breathable technology

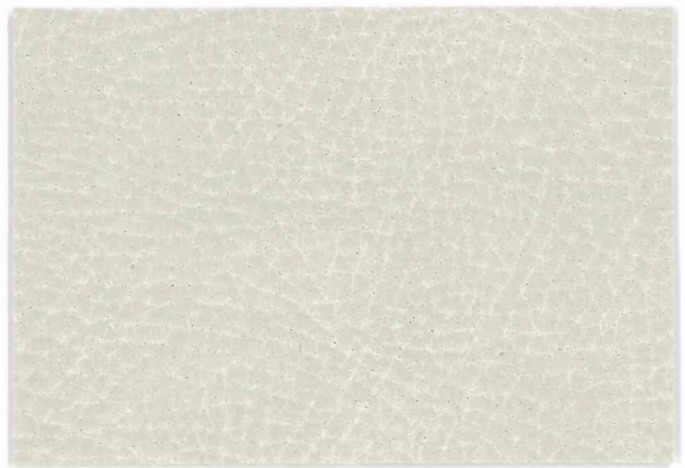

535-3274 Coyote




533-5747 White




533-3019 Birch




533-3051 Ginger




533-4510 Celery



533-3276 Wishbone



533-3480 Navajo Ivory



533-3134 Buckskin



533-4487 Sage



533-3273 Shield




533-3946 New Sand



533-3591 Caramel



533-5703 Wrought Iron



533-5802 Ash



533-3914 Bark



533-8245 Cinnabar



533-2645 Cambridge Blue




533-3232 Railroad



533-3871 Moccasin



533-3825 Canyon



533-2620 Evening Blue



533-5749 Black Onyx



533-3913 Truffle




533-9400 Cabernet



533-2694 Night Navy

## Ultraleather® | Tottori

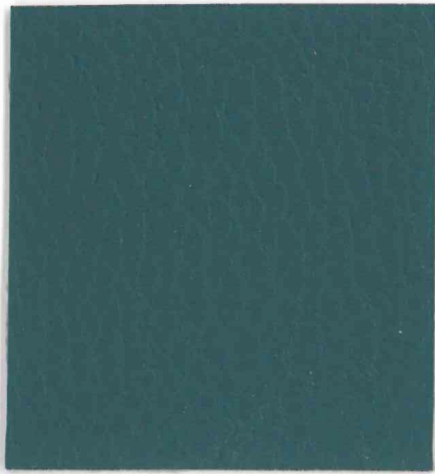

601-2622 Blue Mirage



601-5998 Rice Paper



601-3120 Udon



601-3348 Ginseng NOW!



601-2595 Hot Spring



601-5033 Sand Castle



601-3386 Desert Dune



601-1404 Rouge



601-2515 Shibori Blue



601-5020 Black Sesame NOW!



601-4312 Lichen NOW!




601-3297 Soy Sauce



601-9362 Orchid

## Ultraleather® | Promessa®

EPA-registered antimicrobial protection

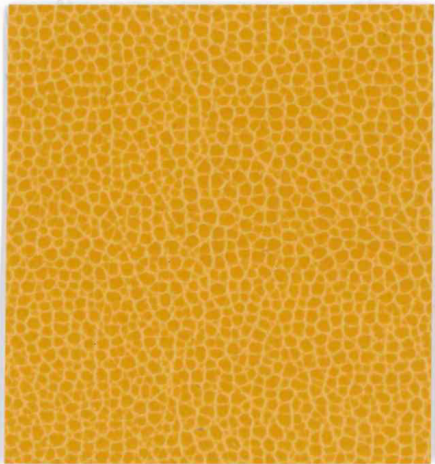

363-5258 Sun Shower



363-5715 Snow



363-3464 Tusk



363-3145 Bronze



363-2680 Atlantic



363-5818 Ash



363-3152 Parchment NOW!




363-1387 Dogwood




363-2672 Corn Flour



363-5011 Battleship



363-3462 Woodpecker



363-3037 Horsehair



363-7273 Aspen Green

## Ultraleather® | Pro

EPA-registered antimicrobial protection • Ink and denim resistant



554-0008 White Wash



554-5648 Cloud NOW!



554-3811 Swan



554-3087 Woodcres



554-4530 Coastal NOW!




554-5733 Mortar



554-3803 Parfait



554-3376 Dark Chocolate



554-2711 Blueberry



554-5626 Char NOW!



554-3595 Cork NOW!



554-8229 Campfire NOW!



554-2547 Sailor

# SPECIFICATIONS

	<b>Brisa®   Original Brisa®   Distressed</b> Acoustical properties Breathable technology	<b>Ultraleather®   Tottori</b>	<b>Ultraleather®   Promessa®</b> EPA-registered antimicrobial protection	<b>Ultraleather®   Pro</b> EPA-registered antimicrobial protection • Ink and denim resistant*
<b>COMPOSITION:</b> (SURFACE) (BACKING)	100% POLYCARBONATE POLYURETHANE 65% POLYESTER, 35% RAYON	65% POLYESTER, 35% RAYON	65% POLYESTER, 35% RAYON	100% REINFORCED RAYON
<b>WEIGHT:</b> (APPROX)	9.3 OZ. PER SQUARE YARD 315 GRAMS PER SQUARE METRE	11.9 OZ. PER SQUARE YARD 403.9 GRAMS PER SQUARE METRE	12 OZ. PER SQUARE YARD 410 GRAMS PER SQUARE METRE	9.7 OZ. PER SQUARE YARD 330 GRAMS PER SQUARE METRE
<b>THICKNESS:</b>	APPROX. 1.0 MM	APPROX. 1.1 MM	APPROX. 1.1 MM	APPROX. 0.95 MM
<b>WIDTH:</b>	54 INCHES / 137 CM	54 INCHES / 137 CM	54 INCHES / 137 CM	54 INCHES / 137 CM
<b>CHARACTERISTICS</b>				
<b>ABRASION:</b> (MEETS OR EXCEEDS)	ASTM D4157/300,000 DR* BS EN ISO 12947-2 / 160,000 R** *WYZENBEEK **MARTINDALE	ASTM D4157/400,000 DR* BS EN ISO 12947-2 / 200,000 R** *WYZENBEEK **MARTINDALE	ASTM D4157/400,000 DR* BS EN ISO 12947-2 / 180,000 R** *WYZENBEEK **MARTINDALE	ASTM D4157/500,000 DR* BS EN ISO 12947-2 / 200,000 R** *WYZENBEEK **MARTINDALE
<b>AIR PERMEABILITY:</b>	ASTM D737	NA	NA	NA
<b>ANTIMICROBIAL:</b>	NA	NA	ASTM E2180	ASTM E2180
<b>SOUND ABSORPTION:</b>	ASTM C423	NA	NA	NA
<b>HYDROLYSIS:</b>	14+ WEEKS ASTM D3690 SECT. 6.11 (HYDROLYTIC STABILITY) ISO 1419 METHOD C (ACCELERATED AGEING)			
<b>ADHESION OF COATING:</b>	ASTM D751			
<b>TEAR STRENGTH:</b>	ASTM D2261			
<b>BREAKING STRENGTH:</b>	ASTM D5034			
<b>COLORFASTNESS</b>				
<b>CROCKING:</b>	AATCC 8, GRADE 4-5 WET & DRY			
<b>LIGHT FASTNESS:</b>	AATCC 16.3, 200 HOURS, GRADE 4			
<b>F/R RATING (HFR FREE)</b>				
<b>F/R RATING:</b>	ASTM E84 (ADHERED) - CLASS A CA TB 117 - PASS FMVSS 302 & 95/28 ANNEX IV - PASS NFPA 260 - CLASS 1 UFAC - CLASS 1			
<small>* CAN BE TREATED TO MEET FAR SPECIFICATIONS.                  * THESE FABRICS, WHEN TREATED AND/OR USED WITH OTHER COMPATIBLE FURNITURE COMPONENTS, HAVE BEEN SHOWN TO PERFORM UNDER THE FIRE TEST CONDITIONS OF CALIFORNIA TECHNICAL BULLETIN 133, ASTM E84 (UNADHERED), BS 5852 SOURCE 0, 1 &amp; 5 (CIG, MATCH AND CRIB 5), BS 7175, BS 5867 PART 2 TYPE B, IMO PART 8 AND NFPA 701.</small>				

\*REMOVAL OF MOST DENIM DYE MAY VARY DEPENDING ON THE QUALITY OF DYE AND THE PERIOD OF TIME THE STAIN SETS IN. DYE TRANSFER IS DIFFICULT TO CONTROL, NOT ALWAYS PREVENTABLE, AND MAY BE IRREVERSIBLE.

## Certificates & Standards

- SCS Indoor Advantage Gold Certified
  - Meets stringent chemical emission limits for various VOCs (eg. Formaldehyde)
  - Promotes healthier indoor air quality
  - Contributes towards satisfying credits under LEED® and BIFMA
  - Compliant with California Section 01350
- Meets Healthier Hospitals Safer Chemicals Challenge, V2.0\*
  - \* Denotes Ultraleather® | Tottori

## Cleaning & Care Instructions

- Wipe up spills as soon as they occur
- Clean with soap and water or alcohol based cleaners
- Sanitize using (1:5) bleach/water solution or other approved disinfectants
- For ink (Ultraleather® | Pro) or other stubborn stains, wipe off with isopropyl alcohol as soon as possible
- Thoroughly rinse all solution residue with clean water
- Air dry

**NOW!**  
Need it.  
JSI Quickship



225 Clay Street  
Jasper, Indiana 47547

800.622.5661 TOLL  
812.482.3204 OFFICE  
812.482.1548 FAX

JSIFURNITURE.COM

Issued in 2019  
Please notice patterns, pricing, information and availability are subject to change  
Contact Jasper Group or fabric supplier for verification if issue date is beyond three years

JSI.UF.0120.2000



Scan for current textile grades

**ultrafabricsinc.com**

Ultrafabrics® and logo, Ultraleather®, Brisa®, and Promessa® are trademarks of Ultrafabrics Inc. Made in Japan.

